

1N60PWS

SCHOTTKY BARRIER DIODE

Features


- High reliability
- Low forward voltage and reverse current

Applications

- For electronic calculator, etc.
- Low current rectification and high speed switching

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

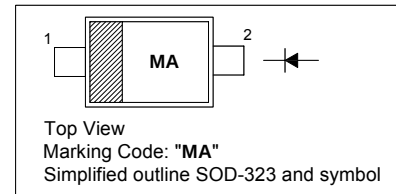


Absolute Maximum Ratings ($T_a = 25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V_{RM}	45	V
Reverse Voltage	V_R	10	V
Average Rectified Output Current	I_O	50	mA
Peak Forward Current	I_{FM}	150	mA
Surge Forward Current	I_{surge}	500	mA
Junction Temperature	T_j	125	$^{\circ}\text{C}$
Storage Temperature Range	T_S	- 55 to + 125	$^{\circ}\text{C}$


Characteristics at $T_a = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Forward Current at $V_F = 1\text{ V}$	I_F	4	-	mA
Reverse Current at $V_R = 10\text{ V}$	I_R	-	50	μA
Reverse Voltage at $I_R = 100\text{ }\mu\text{A}$	V_R	45	-	V
Junction Capacitance at $f = 1\text{ MHz}$, $V = -1\text{ V}$	C_J	-	1	pF
Rectification efficiency at $V_i = 2\text{ Vrms}$, $R = 5\text{ K}\Omega$, $C = 20\text{ pF}$, $f = 40\text{ MHz}$	η	55	-	%




SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)





Dated : 01/09/2006


Forward Characteristics

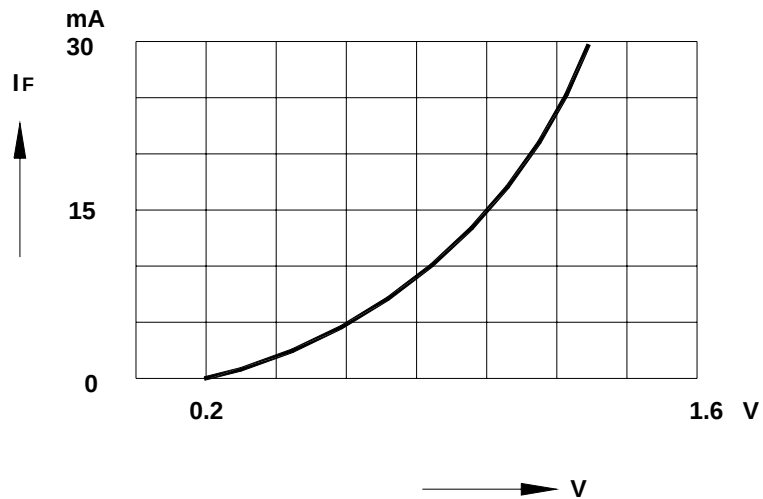

Reverse Characteristics

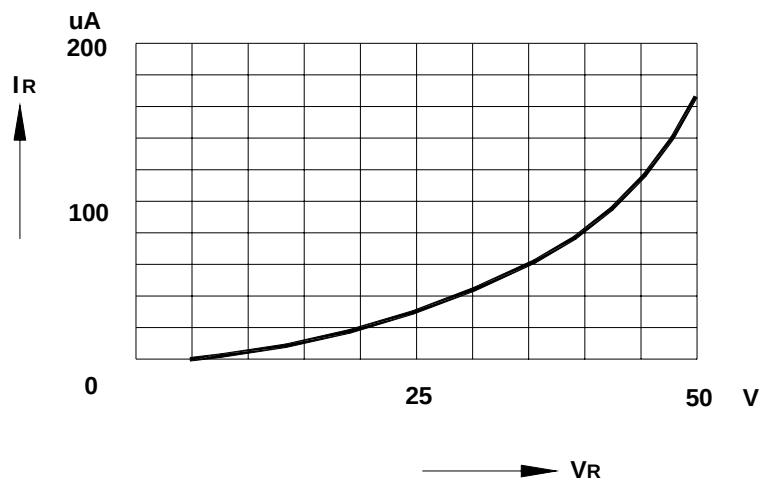

SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company
 listed on the Hong Kong Stock Exchange, Stock Code: 724)




Dated : 01/09/2006


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323

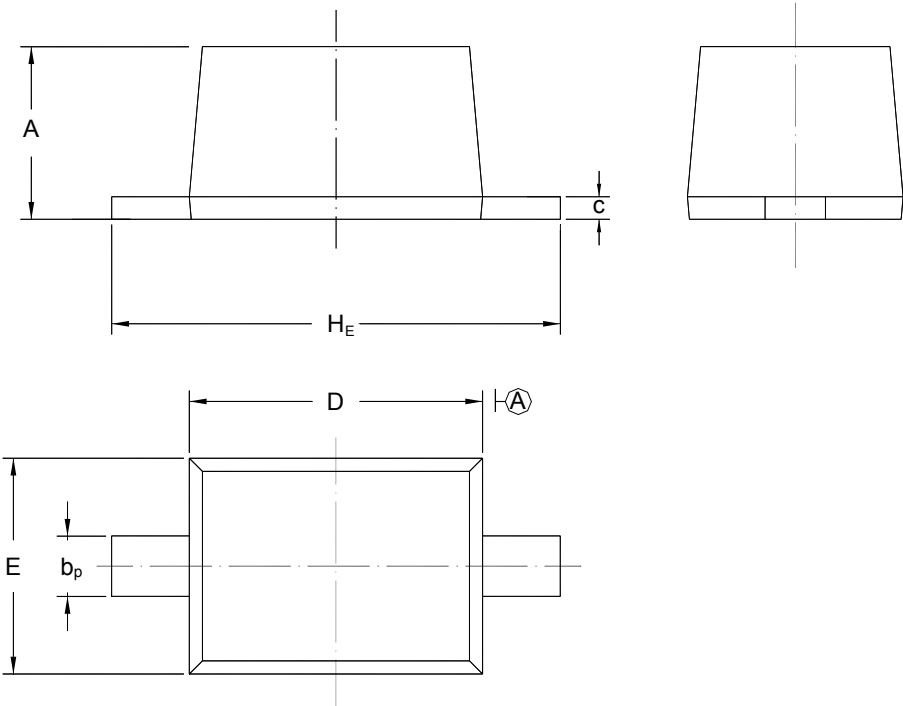

UNIT	A	b _p	C	D	E	H _E
mm	1.10 0.80	0.40 0.25	0.15 0.00	1.80 1.60	1.35 1.15	2.80 2.30



SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 01/09/2006