


1N916, 1N916A, 1N916B

HIGH CONDUCTANCE FAST DIODES

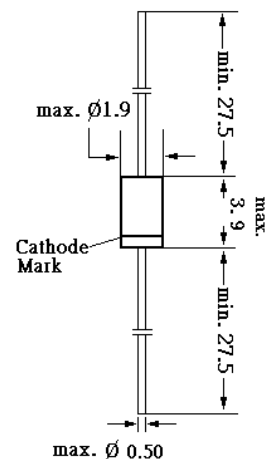


Glass case JEDEC DO-35

Dimensions in mm


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Symbol	Value	Unit
Working Inverse Voltage	W_{IV}	75	V
Average Rectified Current	I_O	200	mA
DC Forward Current	I_F	300	mA
Recurrent Peak Forward Current	i_f	400	mA
Peak Forward Surge Current			
Pulse width = 1 second	$i_{f(\text{surge})}$	1	A
Pulse width = 1 microsecond	$i_{f(\text{surge})}$	4	A
Total Device Dissipation	P_D	500	mW
Derate above 25°C		3.33	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	300	$^\circ\text{C}/\text{W}$
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_s	-65 to +200	$^\circ\text{C}$



SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 31/12/2002


1N916, 1N916A, 1N916B

Characteristics at $T_A = 25^\circ\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
Breakdown Voltage					
at $I_R = 100\mu\text{A}$	B_V	100	-	-	V
at $I_R = 5\mu\text{A}$	B_V	75	-	-	V
Reverse Current					
at $V_R = 20\text{V}$	I_R	-	-	25	nA
at $V_R = 20\text{V}, T_A = 150^\circ\text{C}$	I_R	-	-	50	μA
at $V_R = 75\text{V}$	I_R	-	-	5	μA
Forward Voltage					
at $I_F = 5\text{mA}$ 1N916B	V_F	630	-	730	mV
at $I_F = 10\text{mA}$ 1N916	V_F	-	-	1	V
at $I_F = 20\text{mA}$ 1N916A	V_F	-	-	1	V
at $I_F = 30\text{mA}$ 1N916B	V_F	-	-	1	V
Diode Capacitance					
at $f = 1\text{MHz}$	C_O	-	-	2	pF
Reverse Recovery Time					
at $I_F = 10\text{mA}, V_R = 6\text{V}(60\text{mA}),$ $I_{RR} = 1\text{mA}, R_L = 100\Omega$	t_{rr}	-	-	4	ns


Notes:

1. These ratings are based on a maximum junction temperature of 200 degrees C.
2. These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)




Dated : 31/12/2002


1N916, 1N916A, 1N916B

Typical Characteristics

REVERSE VOLTAGE vs REVERSE CURRENT
BV-1.0 to 100 μ A

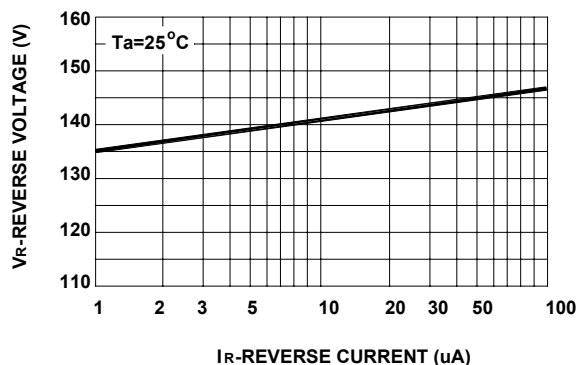


REVERSE CURRENT vs REVERSE VOLTAGE
Ir-10 to 100 V

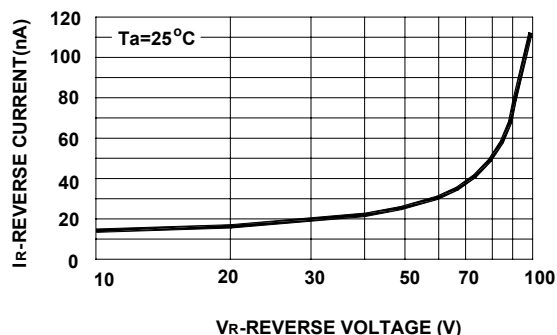


GENERAL RULE: The Reverse Current of a diode will approximately double for every ten (10) Degree C increase in Temperature


FORWARD VOLTAGE vs FORWARD CURRENT
Vf-1 to 100 μ A

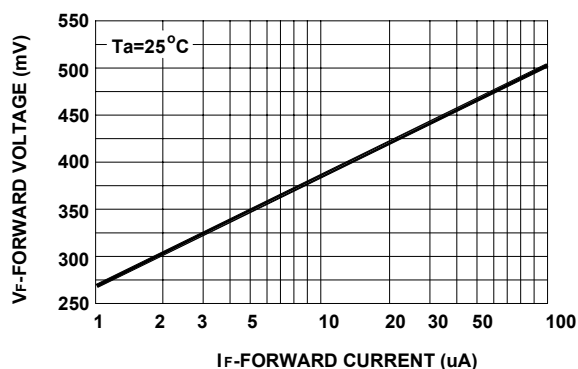



FORWARD VOLTAGE vs FORWARD CURRENT
Vf-0.1 to 100 mA

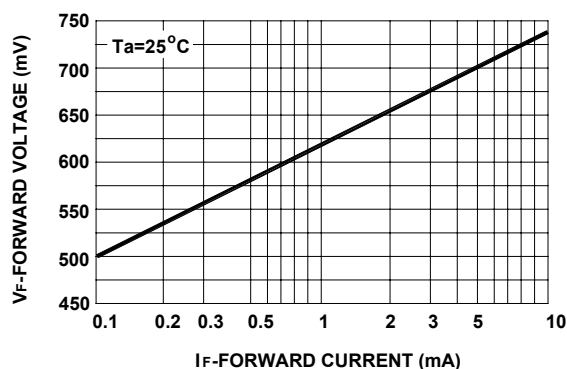

FORWARD VOLTAGE vs FORWARD CURRENT
Vf-10 to 800 mA

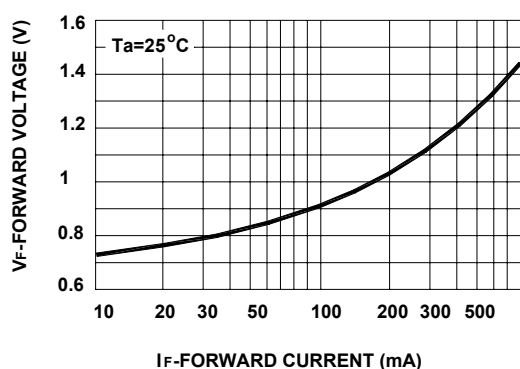


FORWARD VOLTAGE vs AMBIENT TEMPERATURE
Vf-0.01 - 20 mA (-40 to +65 Deg C)

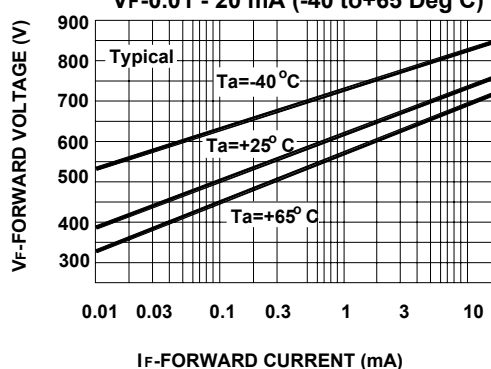

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




Dated : 31/12/2002


1N916, 1N916A, 1N916B

Typical Characteristics


CAPACITANCE vs REVERSE VOLTAGE
VR=0.0 to 15 V

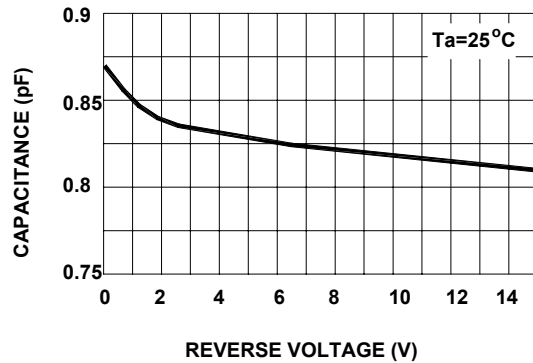



REVERSE RECOVERY TIME vs REVERSE CURRENT

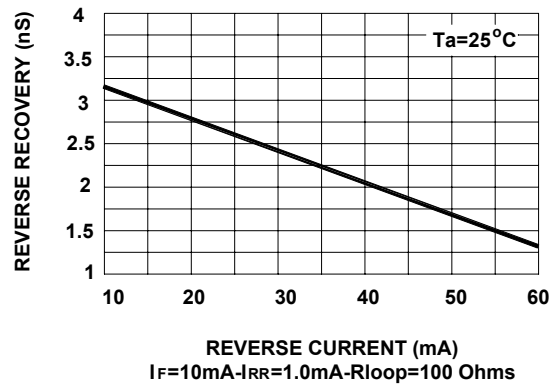

Average Rectified Current (Io) & Forward Current (IF) versus Ambient Temperature (TA)

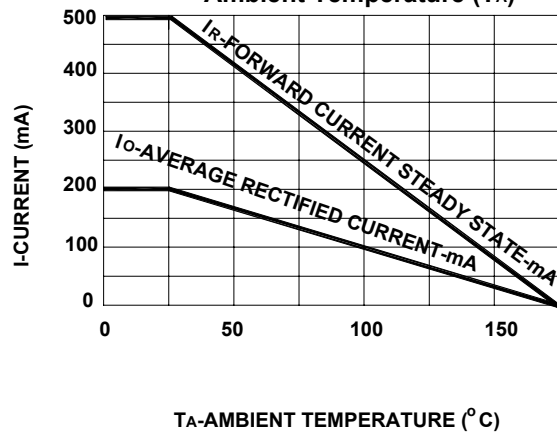


POWER DERATING CURVE

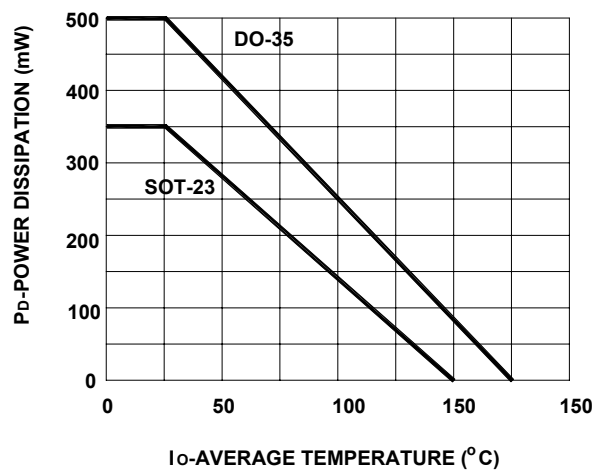

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 31/12/2002