JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

TO-220 Plastic-Encapsulate Voltage Regulator

CJ7805 Three-terminal positive voltage regulator

TO-220

1.IN

2.GND

3.OUT



1 2 3

FEATURES

Maximum Output current I_{OM}: 1.5 A

Output voltage V_o: 5V

Continuous total dissipation

P_D: 1.5 W (T_a = 25℃)

15 W(T_c = 25℃)

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	℃/W
Thermal resistance junction-cases	$R_{\theta JC}$	5	℃/W
Operating Junction Temperature Range	T_{OPR}	0-125	℃
Storage Temperature Range	T_{STG}	-65-150	℃

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JINCTION TEMPERATURE (Vi=10V,Io=500mA,Ci=0.33μF, Co=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions		MIN	TYP	MAX	UNIT
Output voltage	Vo		25℃	4.8	5.0	5.2	V
		7V≤V_i≤20V, Io=5mA-1A, P≤15W	0-125℃	4.75	5.00	5.25	V
Load Regulation	△Vo	Io=5mA-1.5A	25℃		9	100	mV
		Io=250mA-750mA	25℃		4	50	mV
Line regulation	△Vo	7V≤V_i≤25V	25℃		4	100	mV
		8V≤V_i≤12V	25℃		1.6	50	mV
Quiescent Current	Iq		25℃		5	8	mA
Quiescent Current Change	△Iq	7V≤V_i≤25V	0-125℃		0.3	1.3	mA
		5mA≤I_O≤1A	0-125℃		0.03	0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25℃		42		uV
Output voltage drift	△Vo/△T	I_O=5mA	0-125℃		-1.1		mV/℃
Ripple Rejection	RR	8V≤V_i≤18V,f=120Hz	0-125℃	62	73		dB
Dropout Voltage	Vd	Io=1A	25℃		2		V
Output resistance	R_O	f=1KH_Z	25℃		10		mΩ
Short Circuit Current	Isc		25℃		230		mA
Peak Current	Ipk		25℃		2.2		A

TYPICAL APPLICATION

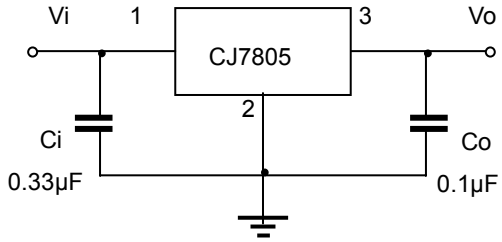

Typical Characteristics

CJ78XX

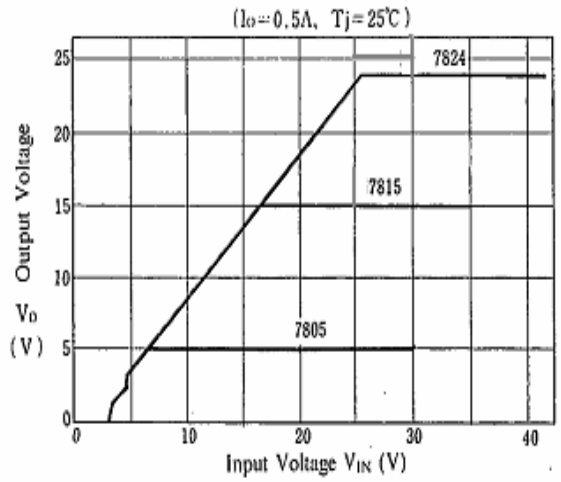

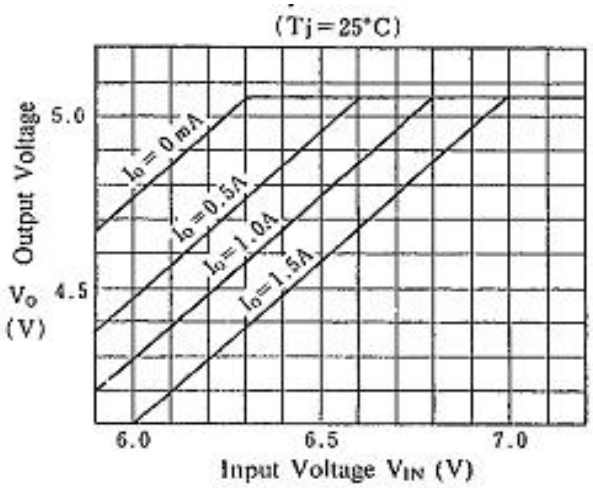

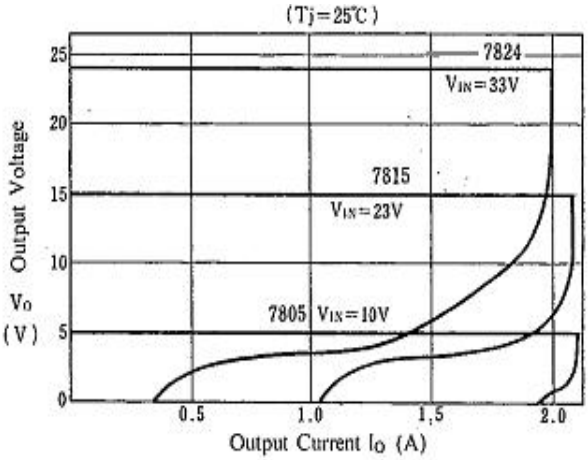

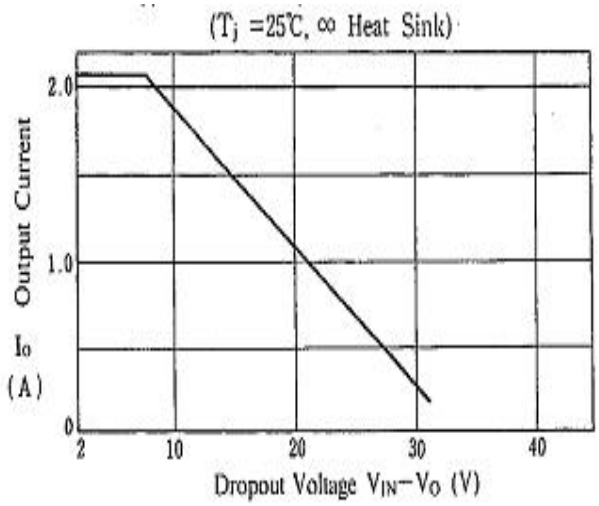

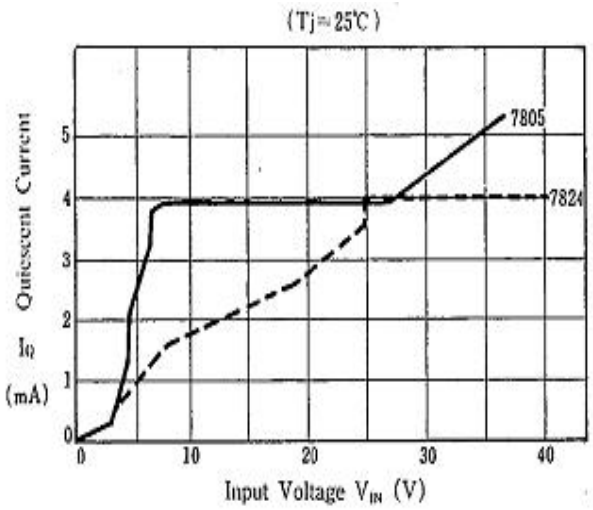

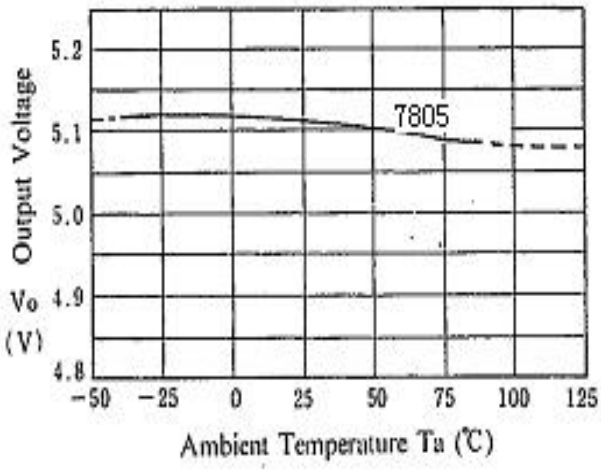
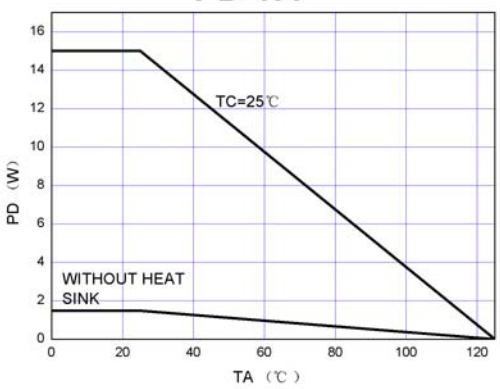
PD-TA