



SOT-89 Encapsulate Three Terminal Voltage Regulator

CJ78L06 Three-terminal positive voltage regulator

FEATURES

Maximum Output current

I_{OM} : 0.1 A

Output voltage


V_O : 6 V

SOT-89

1. OUT

2. GND

3. IN




ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+125	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($V_I=11V, I_O=40mA, 0^{\circ}C < T_J < 125^{\circ}C, C_1=0.33\mu F, C_O=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_O	$T_J=25^{\circ}C$	5.75	6.0	6.25	V
		$8V \leq V_I \leq 20V, I_O=1mA \sim 40mA$	5.7	6.0	6.3	V
		$8V \leq V_I \leq V_{MAX}, I_O=1mA \sim 70mA$	5.7	6.0	6.3	V (note)
Load Regulation	ΔV_O	$T_J=25^{\circ}C, I_O=1mA \sim 100mA$		16	80	mV
		$T_J=25^{\circ}C, I_O=1mA \sim 40mA$		9	40	mV
Line regulation	ΔV_O	$8V \leq V_I \leq 20V, T_J=25^{\circ}C$		35	175	mV
		$9V \leq V_I \leq 20V, T_J=25^{\circ}C$		29	125	mV
Quiescent Current	I_q			3.9	6.0	mA
Quiescent Current Change	ΔI_q	$9V \leq V_I \leq 20V$			1.5	mA
	ΔI_q	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		46		uV
Ripple Rejection	RR	$9V \leq V_I \leq 19V, f=120HZ, T_J=25^{\circ}C$	40	48		dB
Dropout Voltage	V_d	$T_J=25^{\circ}C$		1.7		V

TYPICAL APPLICATION

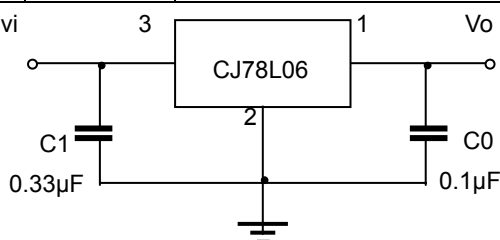

Note 1: Bypass capacitors are recommended for optimum stability and transient response and should be located as close possible to the regulators.