

TO-220 Plastic-Encapsulate Transistors


CJ78M09 Three-terminal positive voltage regulator

FEATURES

Maximum Output current I_{OM} : 0.5 A
 Output voltage V_O : 9V
 Continuous total dissipation
 P_D : 1.5 W ($T_a = 25^\circ\text{C}$)
 15 W ($T_C = 25^\circ\text{C}$)

TO-220

1. IN
2. GND
3. OUT




ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	25	V
Operating Junction Temperature Range	T_{OPR}	0-+125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65-+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=16\text{V}$, $I_o=350\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	25°C	8.65	9	9.35	V
		$11.5\leq V_i\leq 24\text{V}$, $I_o=5\text{mA}-350\text{mA}$ $P_o\leq 15\text{W}$	8.55	9	9.45	V
Load Regulation	ΔV_o	$I_o=5\text{mA}-500\text{mA}$, 25°C		20	180	mV
		$I_o=5\text{mA}-200\text{mA}$, 25°C		10	90	mV
Line regulation	ΔV_o	$11.5\text{V}\leq V_i\leq 26\text{V}$, $I_o=200\text{mA}$, 25°C		6	100	mV
		$12\text{V}\leq V_i\leq 26\text{V}$, $I_o=200\text{mA}$, 25°C		2	50	mV
Quiescent Current	I_q	25°C		4.6	6	mA
Quiescent Current Change	ΔI_q	$11.5\text{V}\leq V_i\leq 26\text{V}$, $I_o=200\text{mA}$, $0-125^\circ\text{C}$			0.8	mA
	ΔI_q	$5\text{mA}\leq I_o\leq 350\text{mA}$, $0-125^\circ\text{C}$			0.5	mA
Output Noise Voltage	V_N	$10\text{Hz}\leq f\leq 100\text{KHz}$, 25°C		60		μV
Ripple Rejection	RR	$13\leq V_i\leq 23\text{V}$, $f=120\text{Hz}$, $I_o=300\text{mA}$, $0-125^\circ\text{C}$	56	80		dB
Dropout Voltage	V_d	$I_o=350\text{mA}$, 25°C		2		V
Short Circuit Current	I_{sc}	$V_i=16\text{V}$, 25°C		250		mA
Peak Current	I_{pk}	25°C		0.5		A

TYPICAL APPLICATION

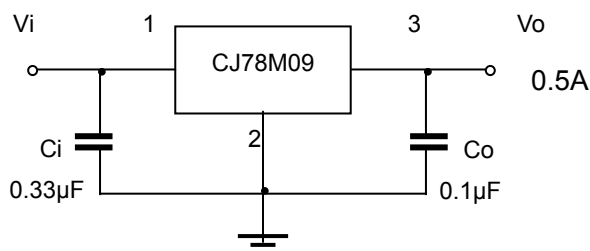

Typical Characteristics

CJ78MXX

