

GBU8005 THRU GBU810



康 比 電 子
HORNBY ELECTRONIC

GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

REVERSE VOLTAGE: 50 to 1000 VOLTS

FORWARD CURRENT: 8.0 AMPERE

FEATURES

- Glass passivated chip junction
- Ideal for printed circuit board
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Reliable low cost construction utilizing molded plastic technique

MECHANICAL DATA

Case: Molded plastic, GBU


Epoxy: UL 94V-0 rate flame retardant

Terminals: Leads solderable per MIL-STD-202, method 208 guaranteed

Mounting position: Any

Weight: 0.15ounce, 4.0gram

GBU

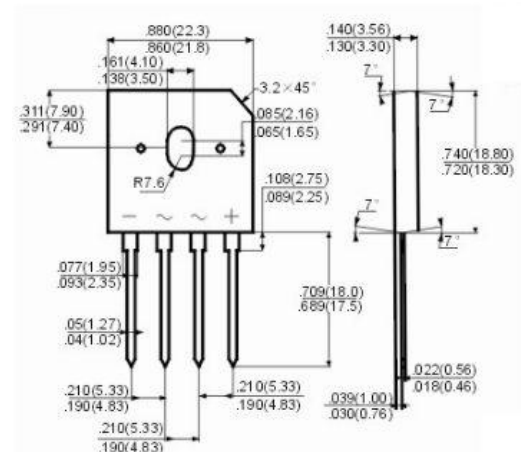

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	GBU8005	GBU801	GBU802	GBU804	GBU806	GBU808	GBU810	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at T _C =100℃ (Note 1)	I _(AV)	8.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	200							Amp
Maximum Forward Voltage at 8.0A DC and 25℃	V _F	1.0							Volts
Maximum Reverse Current at T _A =25℃ at Rated DC Blocking Voltage T _A =125℃	I _R	5.0 500							uAmp
Typical Junction Capacitance (Note 3)	C _J	255				125			pF
Typical Thermal Resistance (Note 4)	R _{θJA}	21							℃/W
Typical Thermal Resistance (Note 4)	R _{θJC}	2.2							℃/W
Operating and Storage Temperature Range	T _J , T _{stg}	-55 to +150							℃

NOTES:

1- Units case mounted on 3.2 x 3.2 x 0.12" thick (8.2 x 8.2 x 0.3cm) Al plate heatsink

2- Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screws

3- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

4- Units mounted in free air, no heatsink on P.C.B., 0.5 x 0.5" (12 x 12mm) copper pads, 0.375" lead length

GBU8005 THRU GBU810

GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER



RATINGS AND CHARACTERISTIC CURVES

Fig. 1 – Derating Curve Output Rectified Current

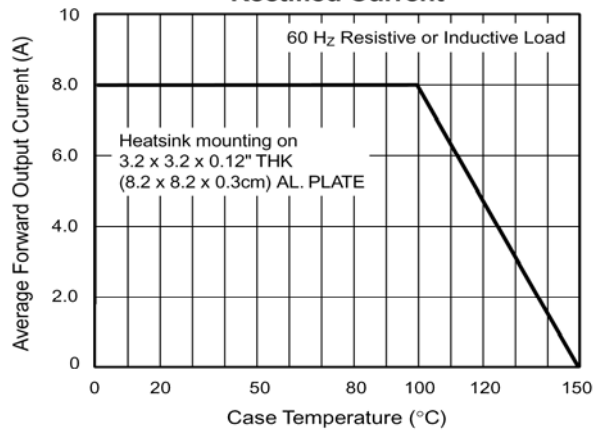


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg

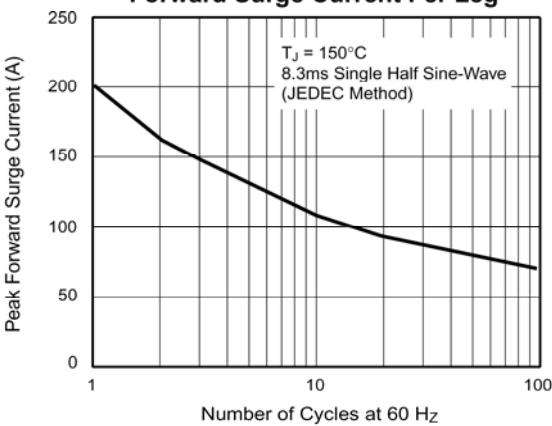


Fig. 3 – Typical Forward Characteristics Per Leg

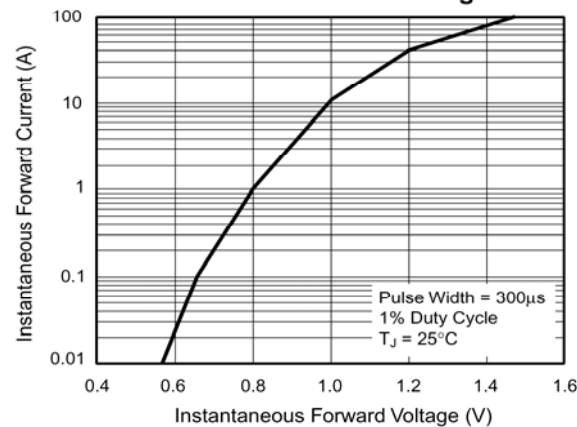


Fig. 4 – Typical Reverse Characteristics Per Leg

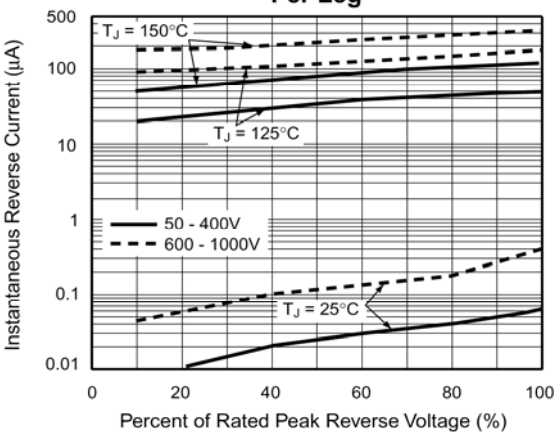


Fig. 5 – Typical Junction Capacitance Per Leg

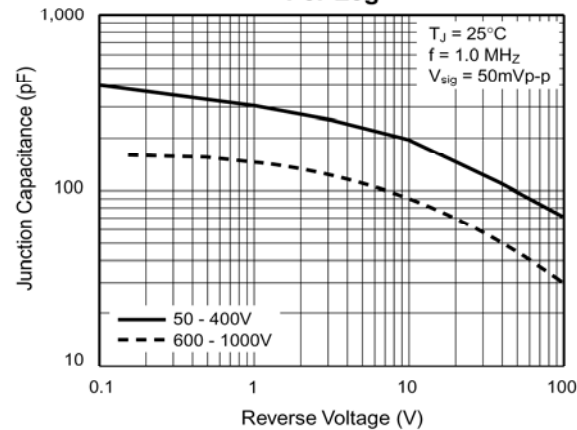


Fig. 6 – Typical Transient Thermal Impedance Per Leg

