

MBR1635 THRU MBR16200

SCHOTTKY BARRIER RECTIFIER



康比電子
HORNBY ELECTRONIC

REVERSE VOLTAGE: 35 to 200 VOLTS
FORWARD CURRENT: 16.0 AMPERE

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
250°C/10 seconds, 0.25" (6.35mm) from case

MECHANICAL DATA

Case: Molded plastic, TO-220A

Epoxy: UL 94V-O rate flame retardant


Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.08ounce, 2.24gram

TO-220A

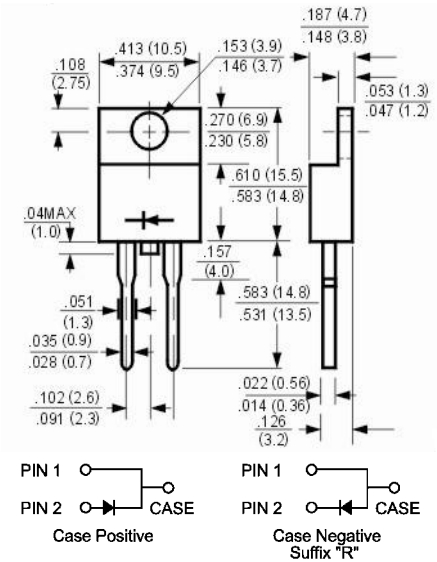

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	MBR1635	MBR1645	MBR1650	MBR1660	MBR1680	MBR16100	MBR16150	MBR16200	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	35	45	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V _{RMS}	24	31	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V _{DC}	35	45	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current See Fig. 1	I _(AV)	16.0								Amp
Peak repetitive forward current at T _C = 125°C (rated VR, sq. wave, 20 KHz)	I _{FRM}	32.0								Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150								Amp
Peak repetitive reverse current at tp = 2.0µs, 1KHz	I _{RRM}	1.0		0.5						Amp
Maximum Forward at I _F = 16A, T _C = 25°C Voltage (Note 1) at I _F = 16A, T _C = 125°C	V _F	0.63 0.57		0.75 0.65		0.85 0.75		0.95 0.92		Volts
Maximum Reverse Current at T _C =25°C at Rated DC Blocking Voltage T _C =125°C	I _R	0.2 30		1.0 45				0.2 30		mAmp
Typical Thermal Resistance	R _{θJC}	3.0								°C/W
Operating Temperature Range	T _J	-55 to +150								°C
Storage Temperature Range	T _{stg}	-55 to +150								°C

NOTES:

1- Pulse test: 300μs pulse width, 1% duty cycle

MBR1635 THRU MBR16200

SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG.1- FORWARD CURRENT DERATING CURVE

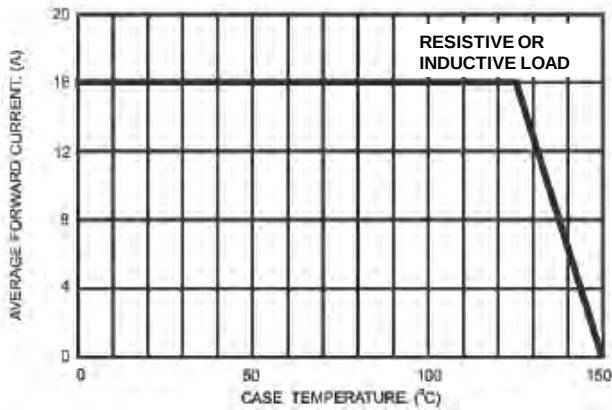


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

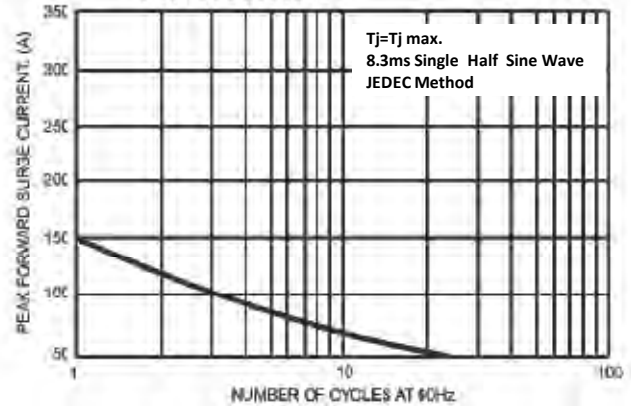


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

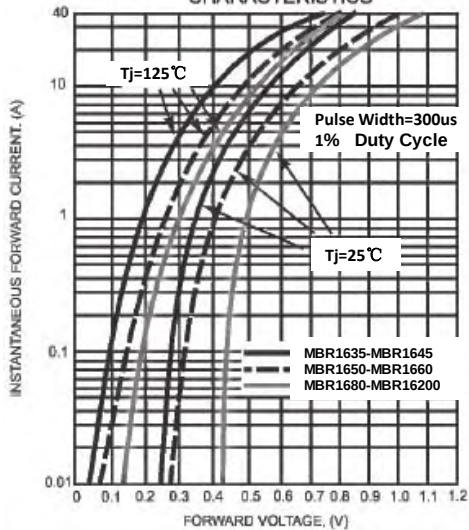


FIG.4- TYPICAL REVERSE CHARACTERISTICS

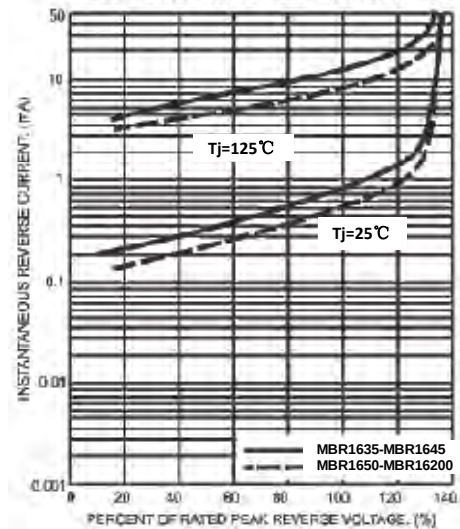


FIG.5- TYPICAL JUNCTION CAPACITANCE

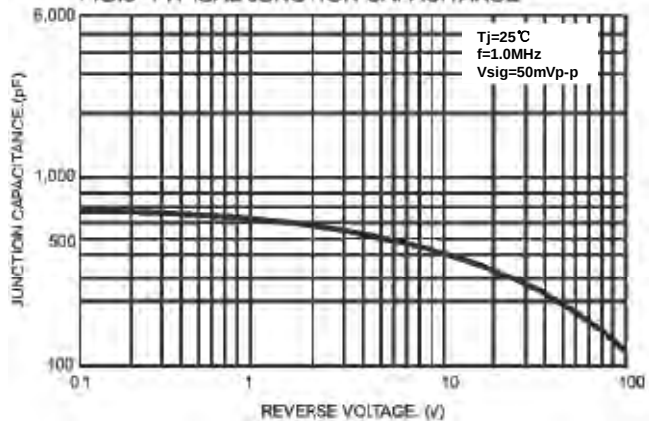


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

