

MBR3035PT THRU MBR30200PT

SCHOTTKY BARRIER RECTIFIER



康比電子
HORNBY ELECTRONIC

REVERSE VOLTAGE: 35 to 200 VOLTS

FORWARD CURRENT: 30.0 AMPERE

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- For use in low voltage, high frequency inverters, free whelling, and polarity protection applications
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case

MECHANICAL DATA

Case: Molded plastic, TO-3P/TO-247AD

Epoxy: UL 94V-O rate flame retardant


Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.2ounce, 5.6gram

TO-3P/TO-247AD

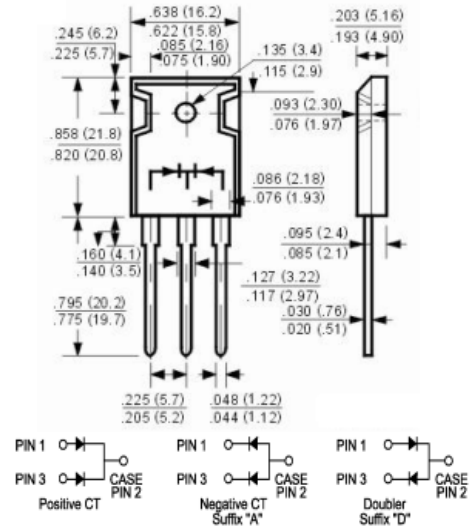

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	MBR3035PT	MBR3045PT	MBR3050PT	MBR3060PT	MBR3080PT	MBR30100PT	MBR30150PT	MBR30200PT	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	35	45	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V _{RMS}	24	31	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V _{DC}	35	45	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current (See Fig. 1)	I _(AV)	30.0								Amp
Peak repetitive forward current at T _C = 105°C (rated VR, sq. wave, 20 KHz)	I _{FRM}	30.0								Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	200								Amp
Peak repetitive reverse current at tp = 2.0μs, 1KHz	I _{RRM}	1.0						2.0		Amp
Maximum Forward Voltage (Note 1)	V _F	-		0.75		0.85		0.95		Volts
at I _F = 15A, T _C = 25°C		-		0.67		0.70		0.85		
at I _F = 15A, T _C = 125°C		0.84		0.95		-		-		
at I _F = 30A, T _C = 25°C		0.75		0.84		-		-		
Maximum Reverse Current at T _C =25°C	I _R	1.0						2.0		mAmp
at Rated DC Blocking Voltage T _C =125°C		60						100		
Typical Thermal Resistance	R _{0JC}	1.4								°C/W
Operating Temperature Range	T _J	-55 to +150								°C
Storage Temperature Range	T _{stg}	-55 to +150								°C

NOTES:

1- Pulse test: 300 μs pulse width, 1% duty cycle

MBR3035PT THRU MBR30200PT

SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG.1- FORWARD CURRENT DERATING CURVE

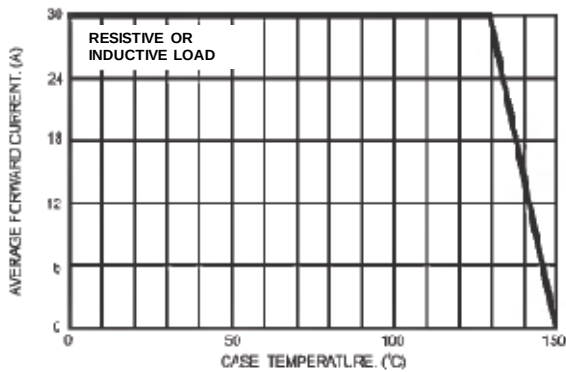


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

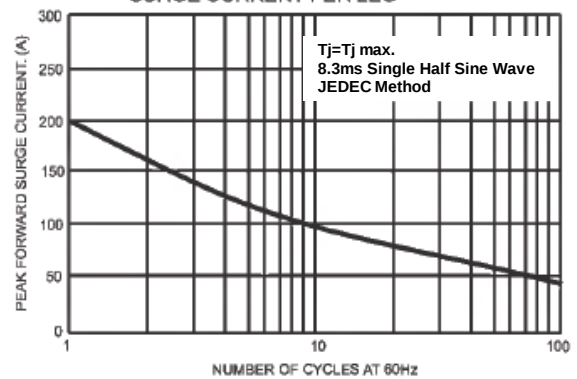


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

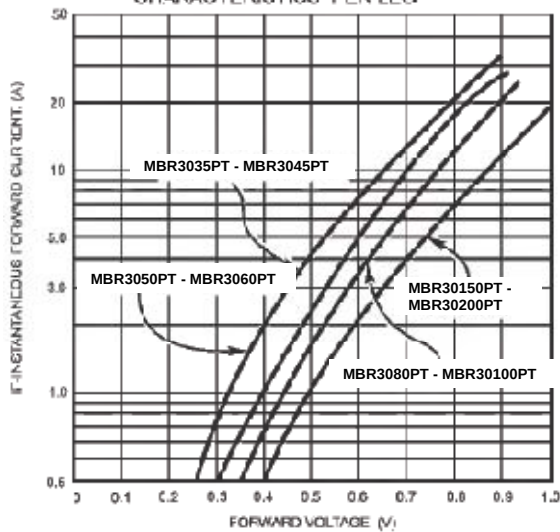


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

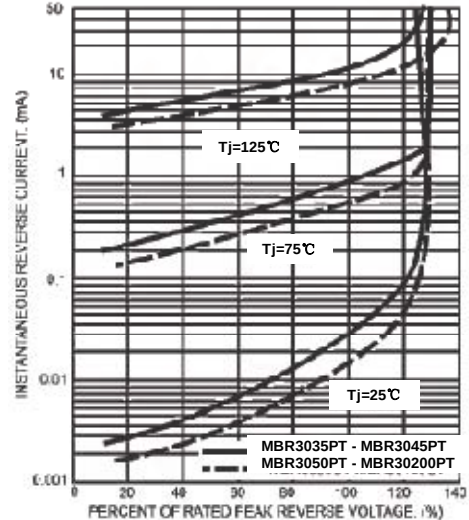


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

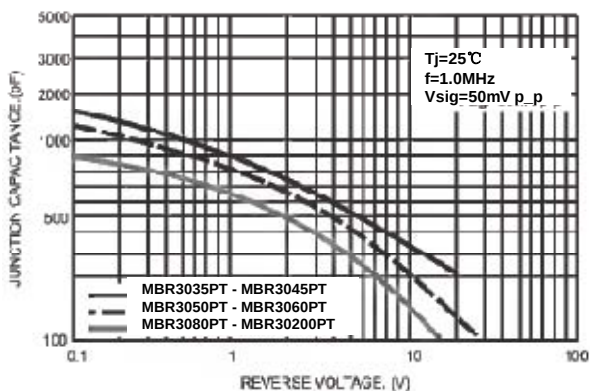


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PFR / FG

