

SR1620 THRU SR16200

SCHOTTKY BARRIER RECTIFIER



REVERSE VOLTAGE: 20 to 200 VOLTS
FORWARD CURRENT: 16.0 AMPERE

FEATURES

- Plastic package has UL flammability classification 94V-0
- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- High capability
- Low power loss, high efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

Case: Molded plastic, TO-220A

Epoxy: UL 94V-0 rate flame retardant


Terminals: Leads solderable per MIL-STD-202
method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.08ounce, 2.24gram

TO-220A

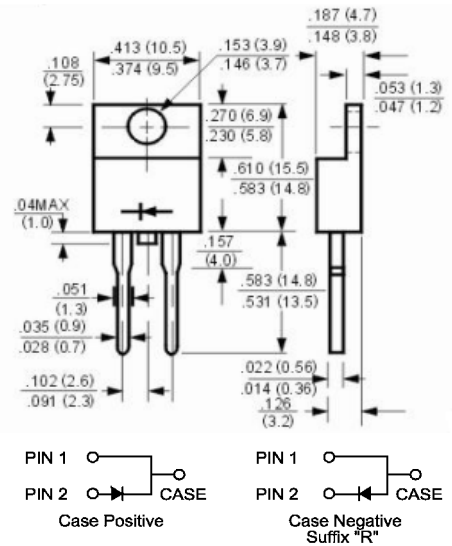

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SR1620	SR1630	SR1640	SR1650	SR1660	SR1680	SR16100	SR16150	SR16200	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current See Fig. 1	I _(AV)	16.0									Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	200									Amp
Maximum Forward Voltage at 16.0A DC and 25°C	V _F	0.55			0.70		0.85		0.95		Volts
Maximum Reverse Current at T _C =25°C at Rated DC Blocking Voltage T _C =125°C	I _R	1.0 50									mAmp
Typical Junction Capacitance (Note 1)	C _J	750			500						pF
Typical Thermal Resistance (Note 2)	R _{θJC}	2.0									°C/W
Operating Temperature Range	T _J	-55 to +125			-55 to +150						°C
Storage Temperature Range	T _{stg}	-55 to +150									°C

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance from Junction to Case Per Leg

SR1620 THRU SR16200

SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

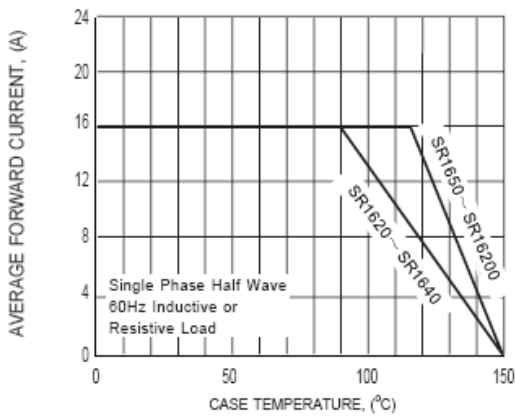


FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

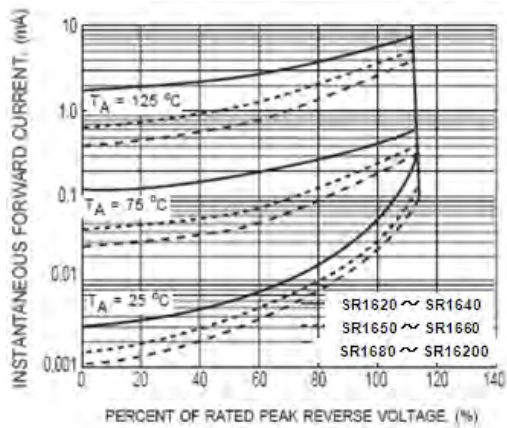


FIG.2 TYPICAL REVERSE CHARACTERISTICS

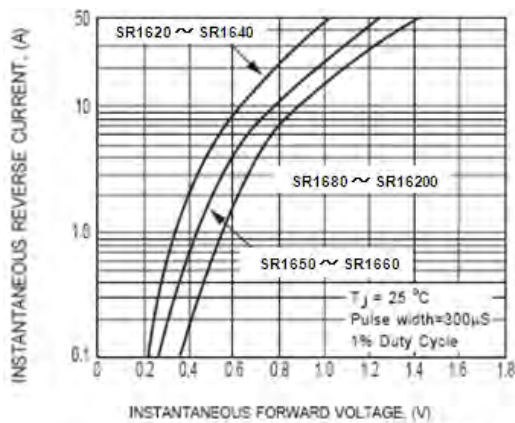


FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

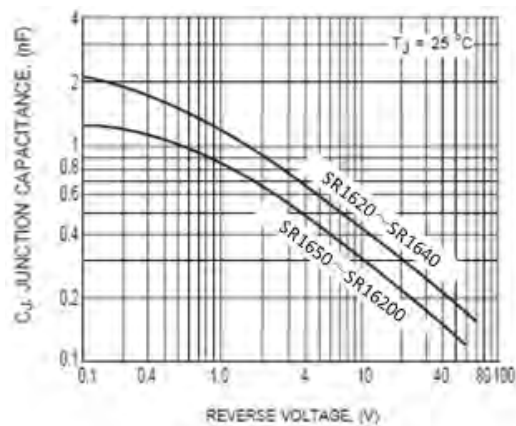


FIG.4 TYPICAL JUNCTION CAPACITANCE

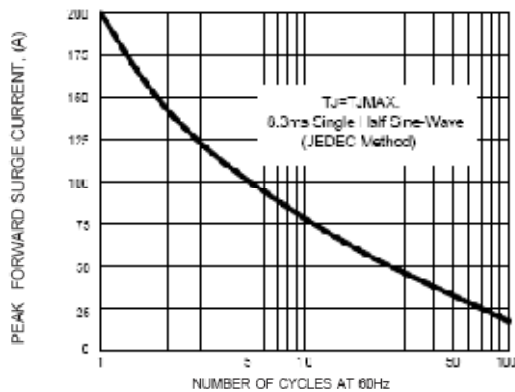


FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT