


ZMC1B ... ZMC200B

SILICON PLANAR ZENER DIODES


LS-31

Features

- Fits onto SOD 323 / SOT 23 footprints
- Micro Melf package



Dimensions in mm

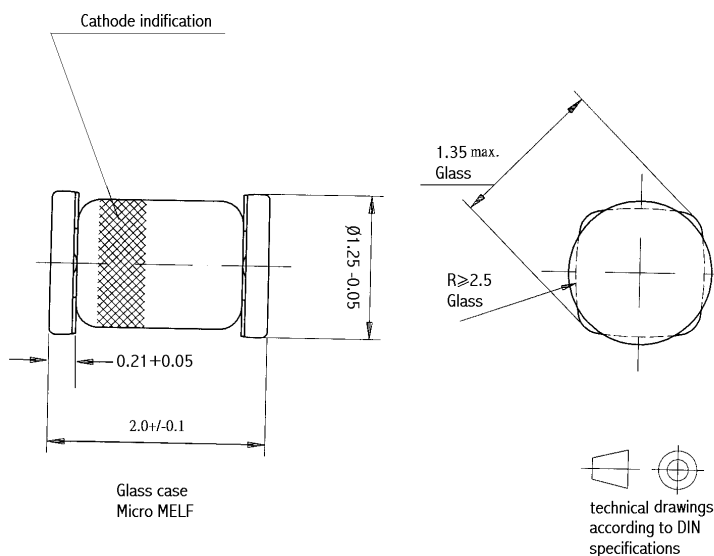


Absolute Maximum Ratings ($T_a = 25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	175	$^{\circ}\text{C}$
Storage Temperature Range	T_s	-55 to +175	$^{\circ}\text{C}$
¹⁾ Valid provided that electrodes are kept at ambient temperature.			

Characteristics at $T_{\text{amb}} = 25\text{ }^{\circ}\text{C}$


Parameter	Symbol	Min.	Max.	Unit
Thermal Resistance Junction to Ambient Air	R_{thA}	-	0.3 ¹⁾	K/mW
¹⁾ Valid provided that electrodes are kept at ambient temperature.				



®

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 19/01/2006


ZMC1B ... ZMC200B

Type	Zener Voltage range ¹⁾			Dynamic resistance			Reverse leakage current			Temp. Coefficient of Zener TK _{VZ} %/K
	V _{Znom} V	I _{ZT} mA	for V _{ZT} ²⁾ V	r _{zjT} Ω	r _{zjK} Ω	at I _{ZK} mA	T _a = 25 °C μA	T _a = 125 °C μA	I _R at V _R V	
ZMC1B ³⁾	0.75	5	0.73...0.77	<8	<50	1	--	--	--	-0.26...-0.23
ZMC2B0	2.0	5	1.96...2.04	<85	<600	1	<100	<200	1	-0.09...-0.06
ZMC2B2	2.2	5	2.15...2.25	<85	<600	1	<75	<160	1	-0.09...-0.06
ZMC2B4	2.4	5	2.35...2.45	<85	<600	1	<50	<100	1	-0.09...-0.06
ZMC2B7	2.7	5	2.64...2.76	<85	<600	1	<10	<50	1	-0.09...-0.06
ZMC3B0	3.0	5	2.94...3.06	<85	<600	1	<4	<40	1	-0.08...-0.05
ZMC3B3	3.3	5	3.23...3.37	<85	<600	1	<2	<40	1	-0.08...-0.05
ZMC3B6	3.6	5	3.52...3.68	<85	<600	1	<2	<40	1	-0.08...-0.05
ZMC3B9	3.9	5	3.82...3.98	<85	<600	1	<2	<40	1	-0.08...-0.05
ZMC4B3	4.3	5	4.21...4.39	<75	<600	1	<1	<20	1	-0.06...-0.03
ZMC4B7	4.7	5	4.6...4.8	<60	<600	1	<0.5	<10	1	-0.05...+0.02
ZMC5B1	5.1	5	4.99...5.21	<35	<550	1	<0.1	<2	1	-0.02...+0.02
ZMC5B6	5.6	5	5.48...5.72	<25	<450	1	<0.1	<2	1	-0.05...+0.05
ZMC6B2	6.2	5	6.07...6.33	<10	<200	1	<0.1	<2	2	0.03...0.06
ZMC6B8	6.8	5	6.66...6.94	<8	<150	1	<0.1	<2	3	0.03...0.07
ZMC7B5	7.5	5	7.35...7.65	<7	<50	1	<0.1	<2	5	0.03...0.07
ZMC8B2	8.2	5	8.03...8.37	<7	<50	1	<0.1	<2	6.2	0.03...0.08
ZMC9B1	9.1	5	8.91...9.29	<10	<50	1	<0.1	<2	6.8	0.03...0.09
ZMC10B	10	5	9.8...10.2	<15	<70	1	<0.1	<2	7.5	0.03...0.1
ZMC11B	11	5	10.78...11.22	<20	<70	1	<0.1	<2	8.2	0.03...0.11
ZMC12B	12	5	11.76...12.24	<20	<90	1	<0.1	<2	9.1	0.03...0.11
ZMC13B	13	5	12.74...13.26	<26	<110	1	<0.1	<2	10	0.03...0.11
ZMC15B	15	5	14.7...15.3	<30	<110	1	<0.1	<2	11	0.03...0.11
ZMC16B	16	5	15.68...16.32	<40	<170	1	<0.1	<2	12	0.03...0.11
ZMC18B	18	5	17.64...18.36	<50	<170	1	<0.1	<2	13	0.03...0.11
ZMC20B	20	5	19.6...20.4	<55	<220	1	<0.1	<2	15	0.03...0.11
ZMC22B	22	5	21.56...22.44	<55	<220	1	<0.1	<2	16	0.04...0.12
ZMC24B	24	5	23.52...24.48	<80	<220	1	<0.1	<2	18	0.04...0.12
ZMC27B	27	5	26.46...27.54	<80	<220	1	<0.1	<2	20	0.04...0.12
ZMC30B	30	5	29.4...30.6	<80	<220	1	<0.1	<2	22	0.04...0.12
ZMC33B	33	5	32.34...33.66	<80	<220	1	<0.1	<2	24	0.04...0.12
ZMC36B	36	5	35.28...36.72	<80	<220	1	<0.1	<2	27	0.04...0.12
ZMC39B	39	2	38.22...39.78	<90	<500	0.5	<0.1	<5	30	0.04...0.12
ZMC43B	43	2	42.14...43.86	<90	<500	0.5	<0.1	<5	33	0.04...0.12
ZMC47B	47	2	46.06...47.94	<110	<600	0.5	<0.1	<5	36	0.04...0.12
ZMC51B	51	2	49.98...52.02	<125	<700	0.5	<0.1	<10	39	0.04...0.12
ZMC56B	56	2	54.88...57.12	<135	<700	0.5	<0.1	<10	43	0.04...0.12
ZMC62B	62	2	60.76...63.24	<150	<1000	0.5	<0.1	<10	47	0.04...0.12
ZMC68B	68	2	66.64...69.36	<200	<1000	0.5	<0.1	<10	51	0.04...0.12
ZMC75B	75	2	73.5...76.5	<250	<1000	0.5	<0.1	<10	56	0.04...0.12
ZMC82B	82	2	80.36...83.64	<300	<1500	0.25	<0.1	<10	62	0.05...0.12
ZMC91B	91	1	89.18...92.82	<450	<2000	0.1	<0.1	<10	68	0.05...0.12
ZMC100B	100	1	98...102	<450	<5000	0.1	<0.1	<10	75	0.05...0.12
ZMC110B	110	1	107.8...112.2	<600	<5000	0.1	<0.1	<10	82	0.05...0.12
ZMC120B	120	1	117.6...122.4	<800	<5500	0.1	<0.1	<10	91	0.05...0.12
ZMC130B	130	1	127.4...132.6	<950	<6000	0.1	<0.1	<10	100	0.05...0.12
ZMC150B	150	1	147...153	<1250	<6500	0.1	<0.1	<10	110	0.05...0.12
ZMC160B	160	1	156.8...163.2	<1400	<7000	0.1	<0.1	<10	120	0.05...0.12
ZMC180B	180	1	176.4...183.6	<1700	<8500	0.1	<0.1	<10	130	0.05...0.12
ZMC200B	200	1	196...204	<2000	<10000	0.1	<0.1	<10	150	0.05...0.12

¹⁾ Tested with pulse t_p = 20 ms.

²⁾ Valid provided that electrodes are kept at ambient temperature.

³⁾ The ZMC1 is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode electrode to the negative pole.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116



ISO 9001:2000
Certificate No. 0506098

Dated : 19/01/2006