



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

SOT-89 Encapsulate Adjustable Reference Source

CJ431 Adjustable Accurate Reference Source

FEATURES


The output voltage can be adjusted to 36V
 Low dynamic output impedance ,its typical value is 0.2Ω
 Trapping current capability is 1 to 100mA
 The typical value of the equivalent temperature factor in the whole temperature scope is 50 ppm/
 The effective temperature compensation in the working range of full temperature
 Low output noise voltage
 Fast on -state respons

SOT-89

1. REFERENCE

2. ANODE

3. CATHODE



ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	SYMBOL	VALUE	UNITS
Cathode Voltage	V_{KA}	37	V
Cathode Current Range (Continuous)	I_{KA}	-100~+150	mA
Reference Input Current Range	I_{ref}	0.05~+10	mA
Power Dissipation	P_D	770	mW
Operating temperature	T_{opr}	0~70	
Storage temperature Range	T_{stg}	-65~+150	

ELECTRICAL CHARACTERISTICS ($T_{amb}=25$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Reference Input Voltage	V_{ref}	$V_{KA}=V_{REF}$, $I_{KA}=10mA$	2.440	2.495	2.550	V
Deviation of reference input Voltage Over temperature (note)	V_{ref}/T	$V_{KA}=V_{REF}$, $I_{KA}=10mA$ $T_{min} \leq T_a \leq T_{max}$		4.5	17	mV
Ratio Of Change in Reference Input Voltage to the change in Cathode Voltage	V_{ref}/V_{KA}	$I_{KA}=10mA$ $V_{KA}=10V \sim V_{REF}$		-1.0	-2.7	mV/V
		$V_{KA}=36V \sim 10V$		-0.5	-2.0	
Reference Input Current	I_{ref}	$I_{KA}=10mA$, $R_1=10K\Omega$ $R_2=\infty$		1.5	4	μA
Deviation Of Reference Input Current Over Full Temperature Range	I_{ref}/T	$I_{KA}=10mA$, $R_1=10K\Omega$ $R_2=\infty$ $T_A=\text{full Temperature}$		0.4	1.2	μA
Minimum cathode current for regulation	$I_{KA(min)}$	$V_{KA}=V_{REF}$		0.45	1.0	mA
Off-state cathode Current	$I_{KA(OFF)}$	$V_{KA}=36V$, $V_{REF}=0$		0.05	1.0	μA
Dynamic Impedance	Z_{KA}	$V_{KA}=V_{REF}$, $I_{KA}=1$ to 100mA $f \leq 1.0KHz$		0.15	0.5	Ω

Note: $T_{MIN}=0$, $T_{MAX}=+70$

SOT-89-3L PACKAGE OUTLINE DIMENSIONS

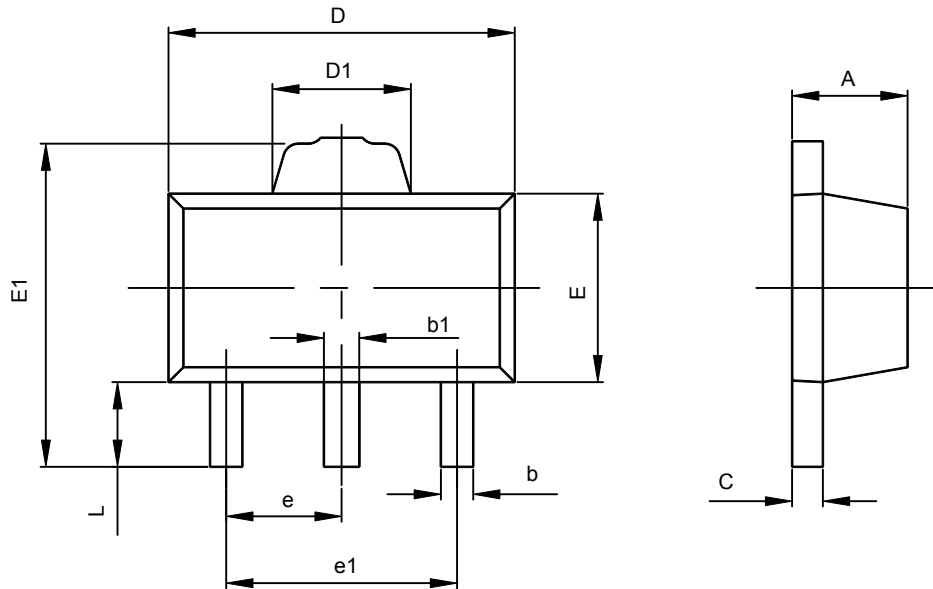

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500TYP		0.060TYP	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043